

## 5820L

### DOOR/WINDOW CONTACT TRANSMITTER



Honeywell's 5820L Slimline Door/Window Contact Transmitter is nearly half the size of standard door/window transmitters. It is ideal for casement and double-hung windows. The 5820L provides a single zone of protection and installs easily on doors or windows with the included mounting hardware or double-side adhesive tape.

## FEATURES

- Sleek design is nearly half the size of competitors
- Easy-to-open case requires no special tools
- Case tamper protection (front and back)
- Ideal for double-hung windows
- Easy replaceable AAA Lithium battery

## SPECIFICATIONS

### Dimensions

- 3.0" H x 0.5" W x 0.8" D
- (76.2mm) x (12.7mm) x (20.3mm)

### Power Source

- 1.5VDC, AAA Lithium battery (supplied)
- or 1.5VDC, AAA Alkaline battery

### Gap

- 0.5" (12.7mm) max distance

### Case Tamper Protection

- Front and back case tamper

### Operating Temperature

- 32° F to 122° F (0° C to 50° C) non-condensing

### Transmit Frequency


- 345 MHz

### Compatibility

- Compatible with all 5800 Series Wireless devices

### Agency Listings

- FCC
- IC
- cULus

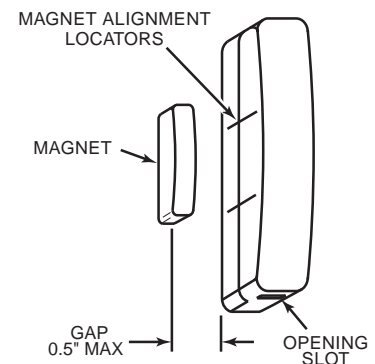

## ORDERING

5820L

Slimline Door/Window Contact Transmitter supplied with Lithium battery

### Honeywell Security & Custom Electronics

PO Box 9035,  
Syosset, NY 11791  
www.honeywell.com

L/5820TRANS/D  
November 2006  
©2006 Honeywell International Inc.