

FlexGuard[®]
Glassbreak Detectors



Your first line of defense.

As the world's leading sensor company, IntelliSense focused its unmatched expertise to create FlexGuard®—a series of glassbreak detectors that provide the best possible perimeter protection by keeping the intruder outside. You can rely on FlexGuard as a first line of defense because it makes perimeter protection as easy to provide—and trouble free—as any other part of the system. Your customers can have the highest level of security possible – without any installation headaches or costly service calls. This add-on sale separates you from the competition by providing your customers with the security they deserve.

A Legacy of Proven Performance

A blend of head-turning style and sophisticated technology, FlexGuard is the industry's most versatile glassbreak detector—the only one to offer a choice of hardwired, wireless or V-Plex polling loop technology for the ultimate in flexibility. It's no wonder there are millions of FlexGuards protecting homes and businesses worldwide—more than any other glassbreak.

Provide your customers with the highest level of security.



Style Meets Technology



- Tamper (optional)
- Microphone
- 45° Terminal Blocks
- E.O.L. Resistor Terminals
- Centered Wire Entry Hole
- Sensitivity Selection DIP Switch
- Enclosed PC board protects all critical components
- Event LEDs

FlexGuard glassbreaks feature a modern, leading-edge design that's simple, uncluttered and blends with any decor. Whether choosing the hardwired, wireless or V-Plex polling loop version, all FlexGuard glassbreaks share the same sleek, sophisticated packaging design.

FlexGuard detectors mount virtually anywhere—on walls, window frames or ceilings—and are UL, ULC and CE listed for all glass types, including plate, tempered, laminated, wired, film-coated and sealed insulating.



- Break away tabs for surface mount
- Large channeling area for wiring

Designed with the Inst



Captive Mounting Holes

Special size mounting holes hold screws in place while mounting the detector, making installation easier than ever.



Elliptical mounting holes allow for adjustment during installation.



Trouble-free installation



FlexGuard glassbreaks are ideally suited for use in both residential and light commercial applications. FG-1625F Flush mount shown above.

Installation-Friendly Flush Mount Design

The generous physical design adequately covers the size of any single gangbox!

taller in Mind.



Patented Remote Test Activation

Patented technology can activate and deactivate the test mode from up to 15 feet away. The FG-701 simulator is compatible for testing all IntelliSense and ADEMCO glassbreak detectors



Your Trusted Partner

Dealers and installers worldwide rely on FlexGuard's patented technology for:

- Uncompromising detection
- Trouble-free installation and service
- Reduced costs
- Increased customer satisfaction and retention

Commitment to Quality

FlexGuard delivers the highest level of quality and performance available today, with glassbreaks rigorously challenged in test rooms built to exceed the toughest SIA standards.

Highest level of quality and performance.



FG-1625

- Surface mount design
- No minimum range
- 25' maximum range



FG-1615

- Surface mount design
- No minimum range
- 15' maximum range



FG-1625F

- Flush mount design
- No minimum range
- 25' maximum range



FG-1625R

- Round surface mount design
- No minimum range
- 25' maximum range



FG1625SN

- V-Plex surface mount design
- No minimum range
- 25' maximum range



FG-1608

- Surface mount design with built-in contact
- No minimum range
- 8' maximum range



5853

- Wireless surface mount design
- No minimum range
- 25' maximum range



FG-701

Compatible for testing all IntelliSense and ADEMCO glassbreak detectors

FlexGuard® Glassbreak Detectors



Patented Remote Test Activation

Patented technology can activate and deactivate the test mode from up to 15 feet away. The FG-701 simulator is compatible for testing all IntelliSense and ADEMCO glassbreak detectors



FG-1625

- Surface mount design
- No minimum range
- 25' maximum range



FG-1615

- Surface mount design
- No minimum range
- 15' maximum range



FG-1625F

- Flush mount design
- No minimum range
- 25' maximum range



FG-1625R

- Round surface mount design
- No minimum range
- 25' maximum range



FG1625SN

- V-Plex surface mount design
- No minimum range
- 25' maximum range



FG-1608

- Surface mount design with built-in contact
- No minimum range
- 8' maximum range



5853

- Wireless surface mount design
- No minimum range
- 25' maximum range



FG-701

Compatible for testing all IntelliSense and ADEMCO glassbreak detectors

Your Trusted Partner

Dealers and installers worldwide rely on FlexGuard's patented technology for:

- Uncompromising detection
- Trouble-free installation and service
- Reduced costs
- Increased customer satisfaction and retention

Commitment to Quality

FlexGuard delivers the highest level of quality and performance available today, with glassbreaks rigorously challenged in test rooms built to exceed the toughest SIA standards.

Highest level of quality and performance.


Your first line of defense.

As the world's leading sensor company, IntelliSense focused its unmatched expertise to create FlexGuard®—a series of glassbreak detectors that provide the best possible perimeter protection by keeping the intruder outside. You can rely on FlexGuard as a first line of defense because it makes perimeter protection as easy to provide—and trouble free—as any other part of the system. Your customers can have the highest level of security possible – without any installation headaches or costly service calls. This add-on sale separates you from the competition by providing your customers with the security they deserve.

A Legacy of Proven Performance

A blend of head-turning style and sophisticated technology, FlexGuard is the industry's most versatile glassbreak detector—the only one to offer a choice of hardwired, wireless or V-Plex polling loop technology for the ultimate in flexibility. It's no wonder there are millions of FlexGuards protecting homes and businesses worldwide—more than any other glassbreak.

Provide your customers with the highest level of security.

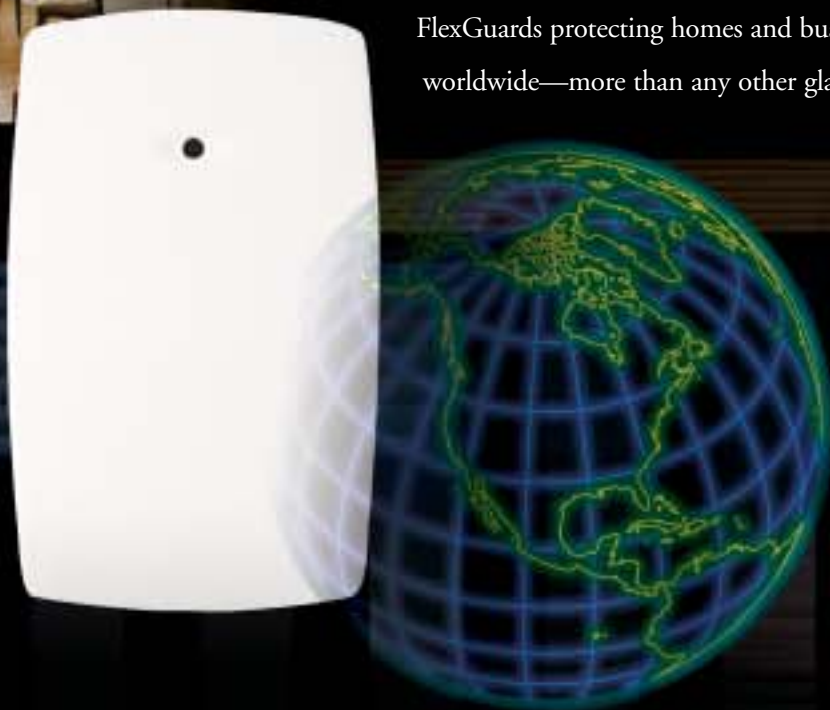

Style Meets Technology



Tamper (optional)

Microphone

45° Terminal Blocks

E.O.L. Resistor Terminals

Centered Wire Entry Hole

Sensitivity Selection DIP Switch

Enclosed PC board protects all critical components

Event LEDs

Break away tabs for surface mount

Large channeling area for wiring

FlexGuard glassbreaks feature a modern, leading-edge design that's simple, uncluttered and blends with any decor. Whether choosing the hardwired, wireless or V-Plex polling loop version, all FlexGuard glassbreaks share the same sleek, sophisticated packaging design.

FlexGuard detectors mount virtually anywhere—on walls, window frames or ceilings—and are UL, ULC and CE listed for all glass types, including plate, tempered, laminated, wired, film-coated and sealed insulating.

Captive Mounting Holes

Special size mounting holes hold screws in place while mounting the detector, making installation easier than ever.

Elliptical mounting holes allow for adjustment during installation.

Trouble-free installation

Installation-Friendly Flush Mount Design

The generous physical design adequately covers the size of any single gangbox!

FlexGuard glassbreaks are ideally suited for use in both residential and light commercial applications. FG-1625F Flush mount shown above.

Designed with the Installer in Mind.