


5828

WIRELESS FIXED ENGLISH VOICE KEYPAD

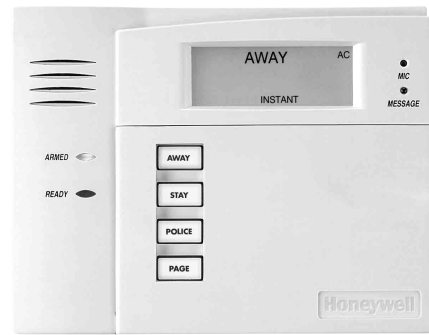

A perfect add-on to any LYNX or VISTA system, the 5828 wireless keypad saves dealers valuable time by offering the quickest, easiest installation of a secondary keypad. The 5828 is easy and inexpensive to install,

with no wires to run. It mounts anywhere—on walls, tabletops and counters—and provides the flexibility and convenience of operating the system from anywhere in the home.

FEATURES

- No wires to run—lower installation time and labor costs
- Compatible with all LYNX and VISTA systems
- Includes three AA batteries or optional AC power pack for “always on” operation
- Large, easy to use keypad with single button operation
- Optional desk mount
- Attractive white console blends perfectly with any décor
- Contoured, removable door conceals soft-touch illuminated keys

SPECIFICATIONS

Physical

6-1/4" W x 4-3/4" H x 1-3/8" D
(159mm x 121mm x 35mm)

Frequency of Operation

345MHz

Sounder

Speaker

Electric

110VAC input, 5.0V Regulated DC output, 220mA

Batteries

Three 1.5V, AA, Alkaline

ORDERING

5828	Wireless Fixed English Keypad
5828V	Wireless Talking Fixed English Keypad
5828DM	Includes Desk Mount and AC Adapter

Honeywell Security & Custom Electronics

Honeywell
2 Corporate Center Drive
Melville, NY 11747
www.honeywell.com

L/5828/D
May 2007
© 2007 Honeywell International Inc.

Honeywell